



Specifications

Base	PBT
Lid	PP GF30
Plunger	POM
Mechanism	Leaf spring
Contacts	Gold plated on silver
Terminals	CuZn silver plated
Temperature range °C	-40°C up to +90°C
Mechanical life	Up to 1 mio. cycles
Protection	IP67
Actuators	Plain plunger, lever, cam follower
Cowl	TPE

Circuit diagram



Dimensions

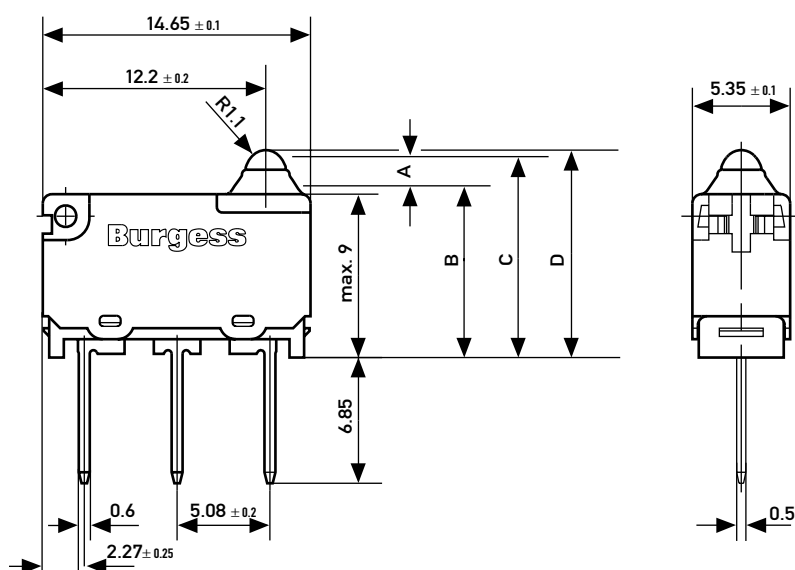

A = Overtravel
 B = End Position
 C = Operating Position
 D = Free Position

Recommended maximum electrical ratings

Voltage (VDC)	Resistive load (A)	Cycles
F6 12 to 30	0.005 – 0.3	500.000